

L O W V O L T A G E

# SOFT STARTERS



A N D D C I N J E C T I O N B R A K E S



# Analogue



**Solbrake**  
DC Injection Brake 10-390A



**Solstart**  
Miniature Soft Starter 8-58A,  
with a built-in bypass



KW 400V	Solbrake Brake Type Ampere	Dimensions (mm)			Wt. (Kg)
		W	H	D	
5.0 *	Solbrake 10 *	90	75	105	1.0
7.5	Solbrake 17	65	190	114	1.3
15	Solbrake 31	65	190	114	1.3
30	Solbrake 58	65	190	114	1.3
55	Solbrake 105	154	280	168	5
90	Solbrake 170	154	280	168	5
110	Solbrake 210	154	280	168	5.4
160	Solbrake 310	224	384	222	12
200	Solbrake 390	224	384	222	12

\* Note: 5.5KW at 415V

KW 400V	Solstart Starter Type Ampere	Dimensions (mm)			Wt. (Kg)
		W	H	D	
4	Solstart 8	45	75	110	0.4
7.5	Solstart 17	90	75	105	0.6
11	Solstart 22	90	75	105	0.6
15	Solstart 31	65	190	114	1.3
22	Solstart 44	65	190	114	1.3
30	Solstart 58	65	190	114	1.3



**Advantages at a glance**

The SMB Electronic Motor Brake provides fast, smooth & frictionless stopping of a three induction phase motor, by injecting controlled DC current to the motor windings, after the mains contactor opened.

- Preventing mechanical wear
- Reducing stopping time of high inertia loads
- Adjustable braking time
- Auto stop - DC Injection stops when motor stops
- DIN Rail mounting (Standard 10A, option 17-58A)
- Easy installation & operation



**Standard ratings**

- Voltages: 230, 400, 460 & 600V (105-390A are available up to 690V)

**Settings**


- Braking Torque - Determines the DC current level injected to the motor windings
- Two operation modes
  - Auto Mode: DC Injection stops automatically when motor stops.
  - Manual Mode: DC Injection stops after the pre-adjusted braking time. This mode can be used to "hold" the load at stand still.

**Displays (LEDs)**

- Mains voltage connected
- Braking Contactor Closed
- DC Injection On

**Applications**

- Circular and band (flywheel) saws
- Machine tools
- Fast stopping of high inertia loads
- Safety brakes (as long as mains supply remains on)



**Advantages at a glance**

- Soft start & Soft stop
- Built-in bypass
- Start / Stop by voltage free contact
- End of Acceleration contact, one-N.O (31-58A only)
- Compact, small foot print
- Plastic case 8-22A, Aluminum case for 31-58A
- DIN Rail mounting (Standard 8-22A, option 31-58A)
- Cost effective

**Standard ratings**


- Voltages: 230, 400, 440, 460 & 600V
- 50 and 60 Hz

**Starter Protection**

- SCR protection by Metal Oxide Varistors

**Displays (LEDs)**

- On - mains voltage connected
- Ramp - voltage is ramping up / down
- Run - motor is running



**Applications**

- Light duty motors in commercial applications
- Small conveyors (post office, supermarkets, etc.)
- Electrically driven gates
- Machine tools
- Appliances

**RVS-BX**  
Basic Soft Starter 8-58A,  
with a built-in bypass



**RVS-AX**  
Analogue Soft Starter 8-170A,  
with a built-in bypass



KW 400V	RVS-BX				
	Starter Type Ampere	Dimensions (mm)			Wt. (Kg)
		W	H	D	
4	RVS-BX 8	65	190	114	1.2
7.5	RVS-BX 17	65	190	114	1.2
15	RVS-BX 31	120	207	105	2.1
22	RVS-BX 44	120	207	105	2.1
30	RVS-BX 58	120	207	105	2.1

KW 400V	RVS-AX				
	Starter Type Ampere	Dimensions (mm)			Wt. (Kg)
		W	H	D	
4	RVS-AX 8	120	232	105	2.6
7.5	RVS-AX 17	120	232	105	2.6
15	RVS-AX 31	120	232	105	2.6
22	RVS-AX 44	120	232	105	2.6
30	RVS-AX 58	129	275	185	5.0
37	RVS-AX 72	129	375	185	5.0
45	RVS-AX 85	129	380	185	8.4
55	RVS-AX 105	129	380	185	8.4
75	RVS-AX 145	172	380	195	11.8
90	RVS-AX 170	172	380	195	11.8



**Advantages at a glance**

- o Three phase control
- o Soft start & Soft stop
- o Built-in bypass (except for 8A)
- o Start / Stop by voltage free contact
- o End of Acceleration Relay, one-N.O contact
- o Compact, small foot print
- o Aluminum case
- o DIN Rail mounting (option, only for 8-17A)
- o Cost effective

**Starter Protection**

- o SCR protection by Metal Oxide Varistors

**Displays (LEDs)**

- o On - mains voltage connected

**Applications**

- o Pumps, Fans, Compressors
- o Conveyors & Monorail systems
- o Machine tools

**Standard ratings**

- o Voltages: 230, 400, 440, 460 & 600V
- o 50 and 60 Hz

**Option**


- o Single phase motor soft starters

Dealers, contact us for quantity discount and / or special design features

**HCC**  
Horizontal Crane Controller



**SEM-N**  
for Naval & Military applications



**Advantages at a glance**

- o Soft start & Soft stop
- o Current Limit
- o Built in motor Protection
- o Built-in bypass (31-170A only)
- o Start / Stop by voltage free contact
- o Compact, small foot print
- o Aluminum case

**Standard ratings**

- o Voltages: 230, 400, 440, 460 & 600V
- o 50 and 60 Hz

**Motor & Starter Protection**

- o Electronic overload
- o Phase loss
- o Starter over-temperature
- o SCR protection by Metal Oxide Varistors

**Displays (LEDs)**

- o On - mains voltage connected
- o Ramp Up / Down
- o Run
- o Overload
- o Phase Loss
- o Over Temperature

**Auxiliary Relays**

- o End of Acceleration Relay, one-N.O contact
- o Fault Relay, one-N.O contact

**Applications**

- o Pumps
- o Compressors
- o Fans & Blowers
- o Conveyors & Monorail systems
- o Starting from weak power supplies (diesel generators, long supply lines, etc.).

# Digital

INSULATION ALARM  
1.2 Mohm



- On
- Start
- Run
- S.Stop
- Stop
- E.Save / Slow
- D.Adj. / Rev.
- Fault

- Start
- Run
- S.Stop
- STOP
- E.Save / Slow
- D.Adj. / Rev.
- Fault



**RVS-DX**  
Digital Soft Starter 8-170A,  
with a built-in bypass



**RVS-DN**  
Digital Soft Starter 8-2700A,  
Heavy Duty, Fully featured



KW 400V	RVS-DX				
	Starter Type Ampere	Dimensions (mm)			Wt. (Kg)
		W	H	D	
4	RVS-DX 8	120	232	122	3.1
7.5	RVS-DX 17	120	232	122	3.1
15	RVS-DX 31	120	232	122	3.1
22	RVS-DX 44	120	232	122	3.1
30	RVS-DX 58	129	275	182	5.2
37	RVS-DX 72	129	275	182	5.2
45	RVS-DX 85	129	380	182	8.5
55	RVS-DX 105	129	380	182	8.5
75	RVS-DX 145	172	380	192	12.5
90	RVS-DX 170	172	380	192	12.5

KW 400V	RVS-DN				
	Starter Type Ampere	Dimensions (mm)			Wt. (Kg)
		W	H	D	
4	RVS-DN 8	153	310	170	4.5
7.5	RVS-DN 17	153	310	170	4.5
15	RVS-DN 31	153	310	170	6.0
22	RVS-DN 44	153	310	217	7.4
30	RVS-DN 58	153	310	217	7.4
37	RVS-DN 72	153	310	217	7.4
45	RVS-DN 85	274	385	238	15
55	RVS-DN 105	274	385	238	15
75	RVS-DN 145	274	385	238	15
90	RVS-DN 170	274	385	238	15
110	RVS-DN 210	590	500	290	44.8
160	RVS-DN 310	590	500	290	44.8
200	RVS-DN 390	590	500	290	44.8
250	RVS-DN 460	623	660*	290	65
315	RVS-DN 580	623	660*	290	65
450	RVS-DN 820	623	660*	290	65
630	RVS-DN 1100	723	1100	370	170
800	RVS-DN 1400	723	1100	370	170
950	RVS-DN 1800	723	1100	370	170
1250	RVS-DN 2150	750	1300	392	240
1400	RVS-DN 2400	900	1300	410	314
1550	RVS-DN 2700	900	1300	410	314



**Advantages at a glance**

- o Small footprint
- o Complete line 8-170A, 220-600V
- o Third generation microprocessor based design circuitry
- o Normal duty, fully rated design including built in bypass
- o Aluminum case
- o Superior starting & stopping characteristics
- o Comprehensive Motor Protection package
- o RS 485 Modbus Communications
- o Frequency autotracking 45-65Hz
- o User friendly
- o Unique optional features including: Analogue output and additional future enhancements

**Standard ratings**

- o Voltages: 230, 400, 440, 460 & 600V

**Starting & Stopping**

- o Soft start & soft stop
- o Current Limit
- o Pump Control Program (See detailed description)
- o Torque and Current Control characteristics
- o Dual Adjustment
- o Pulse start
- o Slow speed forward and reverse

**Motor & Starter Protection**

- o Too many starts
- o Long start time (Stall)
- o Shear-pin (Electronic Fuse for start & run)
- o Electronic overload with selectable curves
- o Under Current
- o Phase loss & Phase Sequence
- o Under, Over and No voltage
- o Load loss (motor not connected)
- o Shorted SCR
- o Starter over-temperature
- o External Fault (Programmable input)
- o SCR protection by Metal Oxide Varistors


**Displays**

- o LCD - Two lines of 16 characters each
- o Multilingual - English, German, French & Spanish
- o Four LEDs - On, Run, Ramp Up/Down, & Fault
- o Statistical Data - Start, Stop & Fault parameters
- o Full script parameter settings

**Controls**

- o Opto isolated inputs
- o Auxiliary relays: Fault, End Of Acceleration or Immediate (programmable)
- o Local and Remote reset
- o RS 485 Modbus Communications for full control, display and programming
- o Future enhancements: analogue In/Out card with Thermistor input, etc.

\* When using bypass contactor, add 160mm for bus-bar extensions.




Available Voltages  
230V, 400V, 500V, 600V, 690V, 1000V

**Pump Control** (common for RVS-DN and RVS-DX)


**Start Curves**

The RVS-DN (DX) incorporates an Intelligent Pump Control Program that allows selection between three special dynamic voltage ramp-up curves, and Torque or Current curves each further reducing peak torque thus extending acceleration time.




**Stop Curves**

When pumping to a higher elevation and motor is soft stopped, motor torque may quickly fall below load torque causing abrupt stalling instead of smoothly decreasing speed to zero. This will create a Water Hammer phenomenon resulting in a loud noise and damage to the pipe system. The Pump Control enables selection between 3 dynamic voltage ramp-down or Torque curves to prevent a stall condition and eliminate Water Hammer.



**Final Torque**

Prior to concluding the deceleration process, motor torque reaches a level where the load torque is higher than motor's torque and the valve closes. The motor continues to run against a closed valve (no load) until it stops. The Final Torque feature enables setting a point where the motor stops when the valve closes.





### Advantages at a glance

- Complete line 8-2700A, 220-1000V
- Heavy duty, fully rated design
- Robust construction
- Superior starting & stopping characteristics
- Comprehensive Motor Protection package
- User friendly
- Maximum ambient temperature: 50°C
- Unique optional features including:
  - Motor Insulation Tester
  - RS 485 Comm. Modbus / Profibus / TCP-IP
  - Thermistor input / Analogue output

### Starting & Stopping

- Soft start & soft stop
- Current Limit
- Pump Control Program
- Torque and Current Control for optimized Starting & Stopping process
- Dual Adjustments - Two Starting & Stopping Characteristics
- Slow speed with electronic reversing
- Pulse start
- Linear Acceleration (tacho feedback)
- Energy Save for improved Power Factor

### Motor & Starter Protection

- Too many starts
- Long start time (Stall)
- Shear-pin (Start+Run+Jam)
- Electronic overload with selectable curves
- Under Current with adjustable delays
- Phase loss & Phase Sequence
- Under, Over & No voltage
- Load loss (motor not connected)
- Shorted SCR
- Starter over-temperature

### Displays LCD & LEDs

- LCD - 2 lines x 16 characters
- Selectable languages: English, German, French & Spanish.
- Two display modes for basic & advanced applications
- Friendly operation with Default parameters
- Eight LEDs for quick operational status
- Statistical Data including:
  - Total run time
  - Total number of starts
  - Total number of trips
  - Last start current
  - Last start time
  - Last trip
  - Current at trip



### Options

- RS 485 Communication (see details below)
- Analogue Output (see details below)
- Thermistor Input (see details below)
- Motor Insulation Test (see details below)
- Preparation for Bypass - to maintain protection when bypass is closed
- Special Anti-Corrosive Treatment - special coating for harsh environments
- Illuminated LCD
- Special Tacho Feedback Circuitry

### Communication (option)

- MODBUS RTU - enables Setting, Control & Supervision
- PROFIBUS DP - enabling Control & Supervision
- TCP/IP - MODBUS/TCP via standard RJ 45 computer network connector

### Analogue card (option)

- Incorporates two functions:
- Thermistor input, PTC or NTC
  - Analogue output, related to motor's current, programmable as 0-10VDC, 4-20mA, 0-20mA or inverse

### Motor Insulation Tester (option)

- A unique feature for submersible pumps, motors installed in harsh environments, etc. The system measures motor insulation when motor is not running. Two programmable levels are available:
- Alarm level, adjustable 0.2-5 MOhm
  - Start Disable level, adjustable 0.2-5 MOhm, preventing starting when insulation is below acceptable levels

### Auxiliary Relays

- Programmable relays, one-C.O 8A, 220VAC
- Immediate with adjustable On and Off delays. Can be dedicated for Shear-pin (Jam) protection.
  - End of Acceleration, with adjustable On delay
  - Fault, programmable as Fault or Fault-fail-safe operation.
  - Low Motor Insulation Alarm (option)

## HRVS-DN 50-850A, 1500-13800V Digital, Medium Voltage Soft Starter Heavy Duty, Fully featured

Please inquire for our new catalogue.


### Applications

#### Industrial

- Pumps
- Hydraulic systems
- Fans & Blowers
- Compressors
- Conveyors

#### Marine & Offshore

- Complete line 8-2700A, 220-1000V
- Heavy duty, fully rated design
- Robust construction
- Generator ready - auto frequency tracking, sustains variations of 45-65Hz while starting
- User friendly operation
- Unique protection for corrosive environments

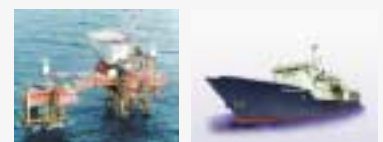

The RVS-DN has Lloyds Type Approval for ENV1, ENV2 (Low Voltage to 1400A)

**1000V for Mining, Quarry & Mixers**  
Digital, fiber optically controlled Soft Starter for 105-390A, Robust, Heavy Duty, Fully featured



# Additional Products

Additional catalogues available from Solcon's product range

## HRVS-DN

High Voltage Digital Soft- Starter  
60-1500A, 1500-13800V



## MPS-3000

Motor Protection & Control Relay



## MPR 2000 / MPC 2000

Motor Protection Relay  
Motor Protection Controller



## HIU

Restart Relay



## MPR 6/3

Motor Protection Relay



## MPC-6

Motor Protection, Control &  
Supervision Relay



## MPR-6/3

Motor Protection with  
Directional Ground Fault



## TPR-6

Digital Temperature  
Protection Relay



## DPM 10

Digital Power Meter



## PFC 10

Reactive Power Factor Controller



## SU 124

Generator Control & Protection



## DGC 2000

Digital Generator Control  
& Protection



Solcon Industries Ltd.  
16 Haminhara Street, Herzliya 46586, Israel  
Tel: 972-9-9588460, Fax: 972-9-9500799  
E-mail : office@solcon.co.il  
Internet : www.solcon.co.il

Solcon Industries Ltd.  
6 Hacarmel Street, Yokneam Industrial Park 20692, Israel  
Tel: 972-4-9890311, Fax: 972-4-9890233  
E-mail : plant@solcon.co.il